


To bend your u-bolts we need to know six things:

- A. Diameter of the bolt measured at the thread (Example 7/16, 1/2, 9/16, 5/8, ect.)
- B. Distance from inside of one leg to inside of the opposite leg, measured close to the top away from the open end. (example 2-1/2", 3", 3 1/4", 4" ect.)
- C. Distance from inside middle of the top to the end of the legs (example 6-1/2", 7", 8" ect.)
- D. Shape of the top (round, square, semi-round)
- E. Thickness of the current spring pack, measured close to the center bolt
- F. Quantity of each size needed. All u-bolts do not measure the same

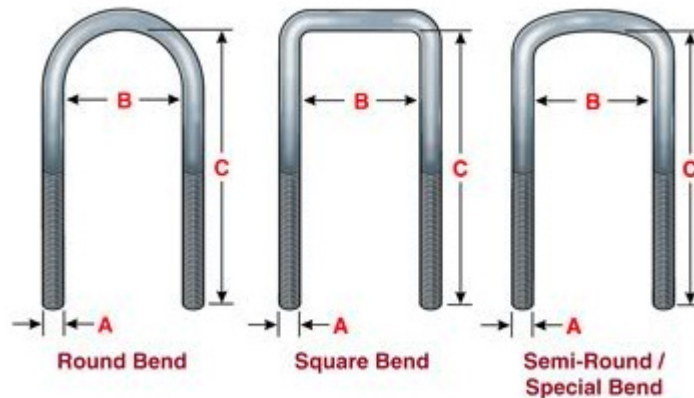

Name _____ Date _____

Phone _____ PO# _____

Vehicle Information:

Year _____ Model _____ Make _____

U-Bolt Information:

Stock _____ x _____ Quantity _____ Shape _____

Diameter (A) _____ Width (B) _____ Length (C) _____

IF YOU HAVE ANY QUESTIONS WHILE YOU ARE DOING YOUR U-BOLT MEASUREMENT,
PLEASE CALL US AT 970.241.2655 OR EMAIL SALES@ALCANSRING.COM